L-GLF100-SP

Square Profile Lite Kit

PRODUCT CUT SHEET

For Variable Door and/or Glass Thickness

- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Countersunk Mounting Screw-Holes
- Minimum 3" Width or Height
  Maximum 88" Width or Height
- #6 Phillips Truss Head SMS
- Gray Primer (GPZ) Powder Coat Finish

Required Information

- Specify Glass Thickness on Order
- Specify Door Thickness on Order if Other Than 1¾"

Available Options

- Powder Coat Color Options - See Color Chart on *ngp.com*
- False Mullion Bars
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc Electroplating
- Glass & Glazing Tape
- Lead Lining - 1/16" Thick

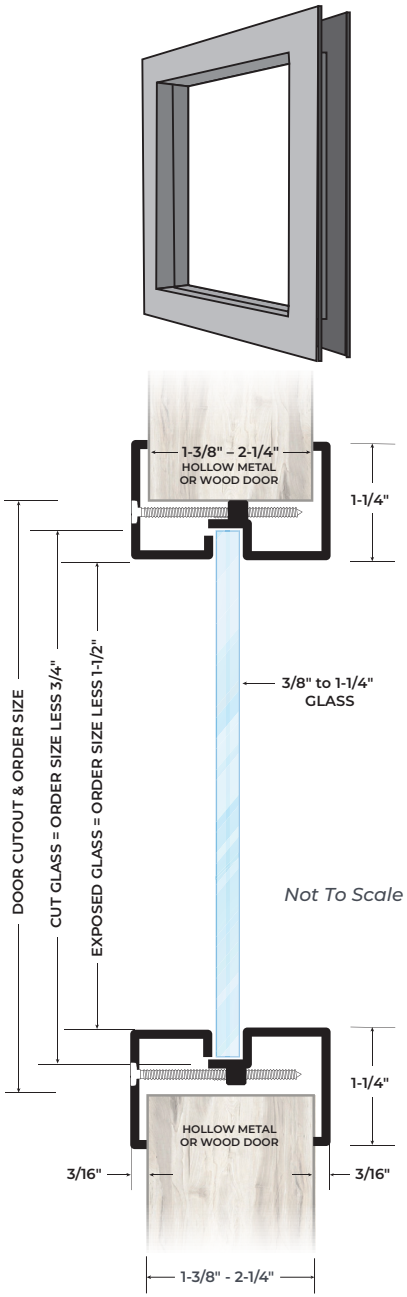

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

- Details Shown are for 1¾" Door Thickness
- Only Configurations Shown are Available
- Thru-Bolts Available for 1¾" Thick Doors Only



DOOR	GLASS	GL. TAPE
2"	1/4"	GT-114
2"	7/16"	GT-118
2"	1/2"	GT-118



DOOR	GLASS	GL. TAPE
1-3/4"	3/8"	GT-114
1-3/4"	1/2"	GT-316
1-3/4"	9/16"	GT-118
1-3/4"	5/8"	GT-118
1-3/8"	1/4"	GT-118
2"	7/8"	GT-118
2-1/4"	1"	GT-316



DOOR	GLASS	GL. TAPE
1-3/4"	3/4"	GT-118



DOOR	GLASS	GL. TAPE
1-3/4"	1"	GT-118
1"	1/4"	GT-118



DOOR	GLASS	GL. TAPE
1-3/4"	1-1/8"	GT-118



DOOR	GLASS	GL. TAPE
1-3/4"	1-1/4"	GT-118
1"	1/2"	GT-118

Designed for Use on 1¾" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".

NGP-LIT-L-GLF100-SP-PCS-0926-A

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

ngp.com
1-800-NGP-RUSH