

L-GLF100

SQUARE PROFILE LITE KIT



**FOR 1 3/4" THICK DOORS AND 3/16",
1/4", OR 5/16" GLASS**



- ▶ 18 Ga. Cold Rolled Steel
- ▶ Mitered and Welded Corners
- ▶ Welded Reinforcing Clips at Corners
- ▶ Counter-Sunk Mounting Screw-Holes
- ▶ #6 X 1 3/4" Phillips Truss Head SMS
- ▶ Available in Uneven and Fractional Sizes
- ▶ Gray Primer (GPZ) Powder Coat Finish

Available Options

- ▶ Powder Coat Color Options - See Page L3
- ▶ False Mullion Bars (Page L14)
- ▶ Torx Security Screws
- ▶ Galvanneal - A40 Steel
- ▶ Zinc Electro-Plating
- ▶ Glass & Glazing Tape - See Glass Section
- ▶ Lead Lining - 1/16" Thick

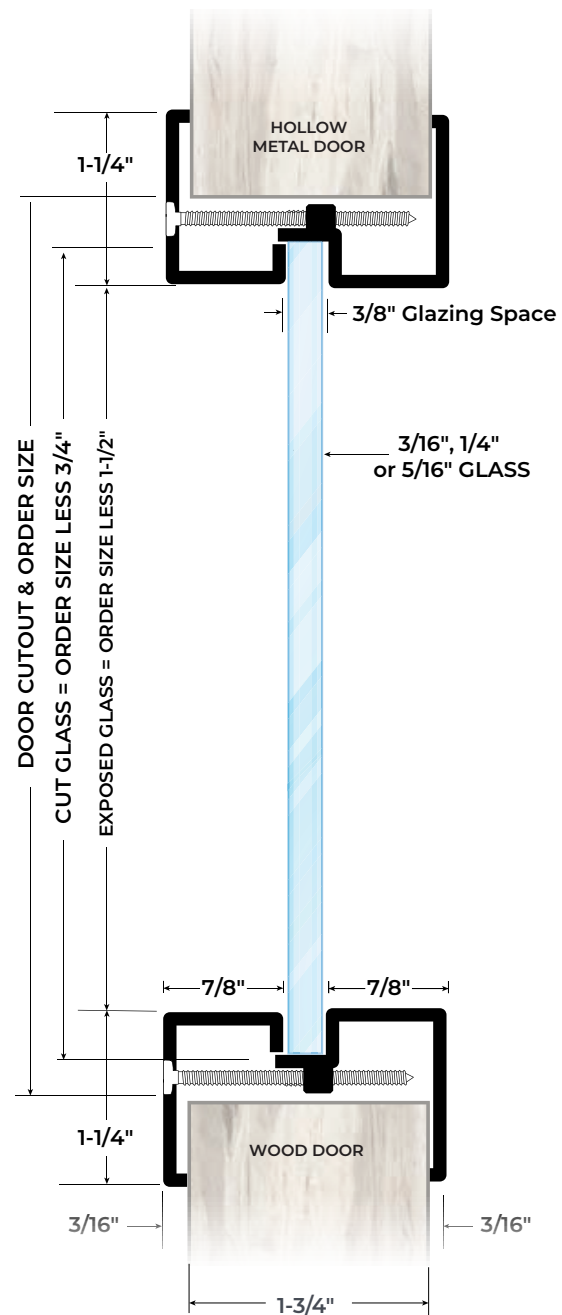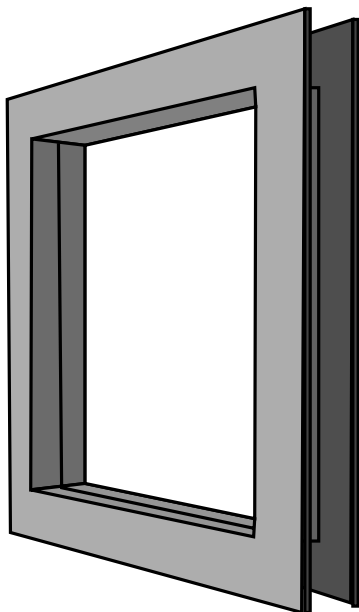

Not To Scale

Designed for Use on 1 3/4" Thick Doors Manufactured
Within Door Industry Tolerance of +/- 1/16".

FALSE MULLION LITE KITS

- ▶ 1" Wide Steel Channel
- ▶ Fits L-GLF100, L-GLF100-SP, L-GLF100-TB, L-GLF100-SP-TB, L-SG100, L-SG100-TB
- ▶ Mullion Bars Welded Into Both Sides of Lite Kit
- ▶ Finished to Match Lite Kit




Available Options

- ▶ Zinc Electro-Plating


To Order

Specify Lite Kit x G# (i.e.: G2, G3, G4 etc.)


If Other Than as Illustrated, Provide Detail & Suffix G-SP




G2
(1 Bar)




G3
(2 Bars)




G4
(2 Bars)




G6
(3 Bars)




G8
(4 Bars)




G9
(4 Bars)




G10
(5 Bars)




G12
(5 Bars)




G15
(6 Bars)



G18
(7 Bars)



G21
(8 Bars)



G24
(9 Bars)