L-GLF100

SQUARE PROFILE LITE KIT

FOR 1 ¾" THICK DOORS AND ³⁄₁₆", ¼", OR ⁵⁄₁₆" GLASS

- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Countersunk Mounting Screw-Holes
- Minimum 3" Width or Height
  Maximum 88" Width or Height
- #6 X 1¾" Phillips Truss Head SMS
- Available in Uneven and Fractional Sizes
- Gray Primer (GPZ) Powder Coat Finish

Available Options

- Powder Coat Color Options - See Page L3
- False Mullion Bars - See Page L13
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc Electroplating
- Glass & Glazing Tape - See Glass Section
- Lead Lining - ¹⁄₁₆" Thick

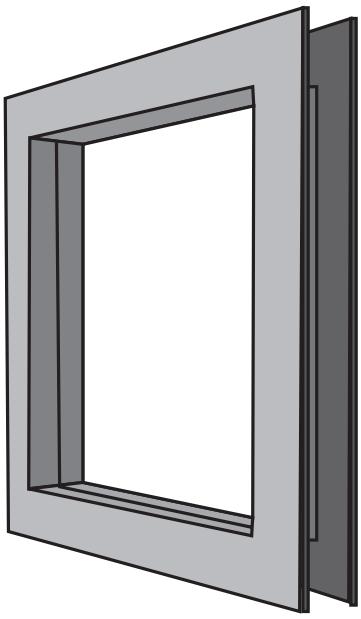

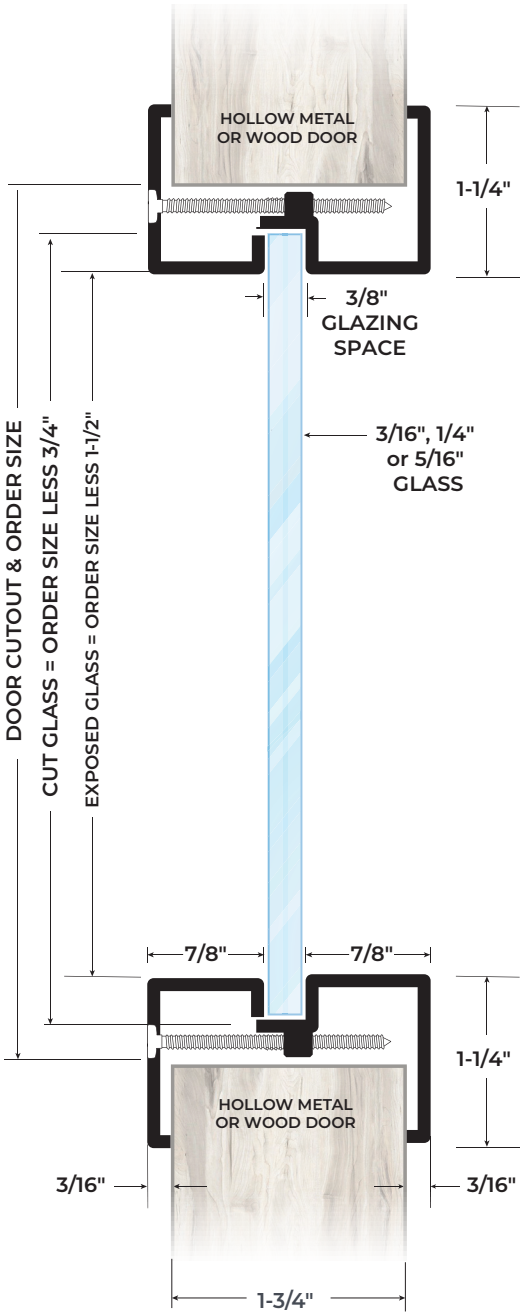

Not To Scale

Designed for Use on 1¾" Thick Doors Manufactured Within Door Industry Tolerance of +/- ¹⁄₁₆".

FALSE MULLION LITE KITS

- 1" Wide Steel Channel
- Fits L-GLF100, L-GLF100-SP, L-GLF100-TB, L-GLF100-SP-TB, L-SG100, L-SG100-TB
- Mullion Bars Welded Into Both Sides of Lite Kit
- Finished to Match Lite Kit

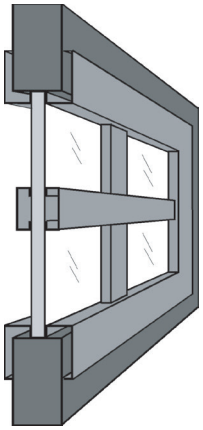

Available Options

- Zinc Electroplating

To Order

Specify Lite Kit x G# (i.e.: G2, G3, G4 etc.)
If Other Than as Illustrated, Provide Detail & Suffix G-SP



G2
(1 Bar)



G3
(2 Bars)



G4
(2 Bars)



G6
(3 Bars)



G8
(4 Bars)



G9
(4 Bars)



G10
(5 Bars)



G12
(5 Bars)



G15
(6 Bars)



G18
(7 Bars)



G21
(8 Bars)



G24
(9 Bars)