L-LAMI-1/4"

LAMINATED GLASS - 1/4" THICK

- ¼" Thick Laminated Architectural Glass
- Composed of Two Plies of Glass and a .030" PVB Interlayer
- Minimum Size 3"
- Maximum Size 51" x 97"
- Manufactured in USA
- **NOT** Fire-Rated
- STC 35

Impact Safety Rating Information

Complies With IBC Requirements for Use in Doors.
Meets ANSI Z97.1 Class A and CPSC 16CFR 1201
(CAT I and II)

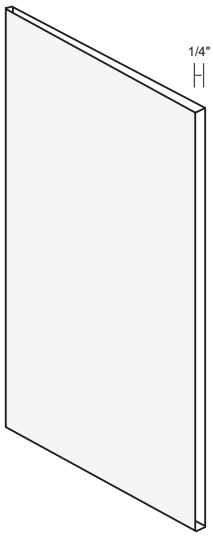

L-PC-1/4", L-PC-1/2"

POLYCARBONATE HIGH IMPACT GLASS - 1/4" OR 1/2" THICK

- Burglary-Resistant Material. Meets UL Standard 972
- Available in ¼", ½" Thicknesses (Specify on Order)
- Colorless Transparent Sheet
- Virtually Unbreakable - 300 Times Stronger Than Ordinary Glass
- Unlikely to Shatter or Chip When Bombarded With Thrown Rocks, Bricks or Bottles
- UV Stabilized to Resist Solar Exposure
- Manufactured in USA
- 5-Year Manufacturer Warranty
- **NOT** Fire-Rated
- Maximum Size 45" x 93"
- ¼" = STC 29
  ½" = STC 34

Impact Safety Rating Information

Complies With IBC Requirements for Use in Doors
Meets ANSI Z97.1 Class A and CPSC 16CFR 1201
(CAT I and II)

Thicknesses Available