

L-SG100

SELF ATTACHING SECURITY GRILLE LITE KIT



*up to 90 minutes

FOR VARIABLE DOOR AND/OR GLASS THICKNESS



- ▶ 18 Ga. Cold Rolled Steel
- ▶ 16 Ga. Steel $\frac{3}{4}$ " x $\frac{3}{4}$ " Security Grille Welded in Both Sides
- ▶ Mitered and Welded Corners
- ▶ Welded Reinforcing Clips at Corners
- ▶ Counter-Sunk Mounting Screw-Holes
- ▶ #6 Phillips Truss Head Screws
- ▶ Gray Primer (GPZ) Powder Coat Finish

Required Information

- ▶ Specify Glass Thickness on Order
- ▶ Specify Door Thickness on Order if Other Than $1\frac{3}{4}$ " (See Page L20 for Available Sizes)

Available Options

- ▶ Powder Coat Color Options - See Page L3
- ▶ False Mullion Bars (Page L14)
- ▶ Torx Security Screws
- ▶ Galvanneal - A40 Steel
- ▶ Zinc Electro-Plating
- ▶ Glass & Glazing Tape - See Glass Section
- ▶ Lead Lining - $\frac{1}{16}$ " Thick

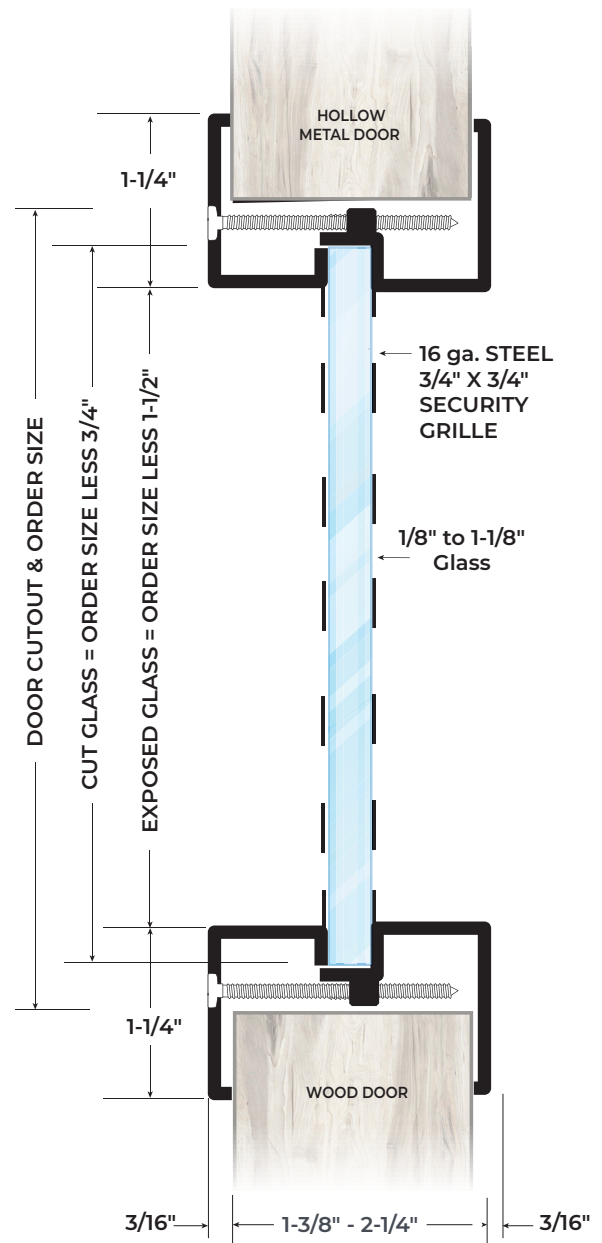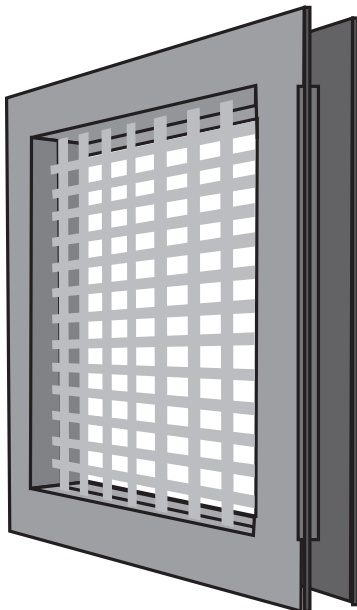

Not To Scale

Designed for Use on $1\frac{3}{4}$ " Thick Doors Manufactured Within Door Industry Tolerance of $\pm\frac{1}{16}$ ".

L-SG100 AND L-SG100-TB

GLASS AND DOOR COMBINATIONS—SECURITY GRILLE

- Details Shown are for 1 3/4" Door Thickness
- Only Configurations Shown are Available
- Thru-Bolts Available for 1 3/4" Thick Doors Only

