




L-SG100

Self-Attaching Security Grille Lite Kit

PRODUCT CUT SHEET

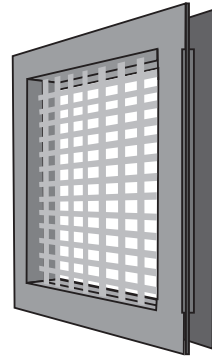

For Variable Door and/or Glass Thicknesses

- 18 Ga. Cold Rolled Steel
- 16 Ga. Steel 3/4" x 3/4" Security Grille Welded in Both Sides
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Countersunk Mounting Screw-Holes
- #6 Phillips Truss Head Screws
- Gray Primer (GPZ) Powder Coat Finish

Required Information


- Specify Glass Thickness on Order
- Specify Door Thickness on Order if Other Than 1 3/4"

Available Options

- Powder Coat Color Options - See Color Chart on ngp.com
- False Mullion Bars
- Torx Security Screws
- Galvanneal - A40 Steel
- Zinc Electro-Plating
- Glass & Glazing Tape
- Lead Lining - 1/16" Thick



*up to 90 minutes

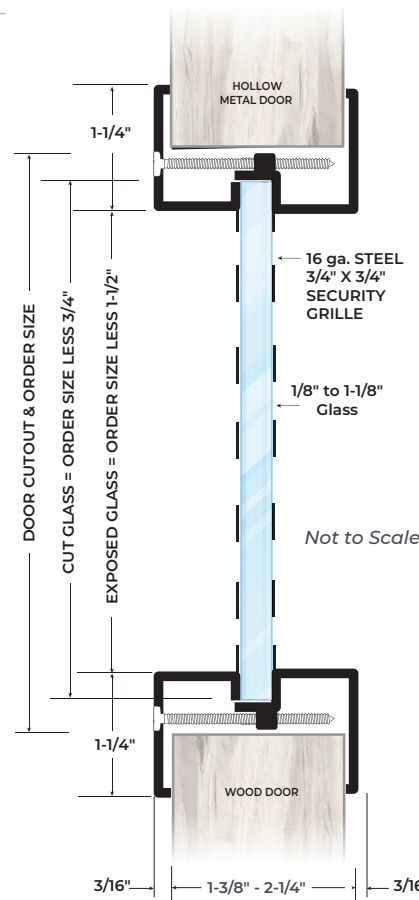

PROJECT:

SUBMITTED BY:

DATE:

NOTES:

- Details Shown are for 1 3/4" Door Thickness
- Only Configurations Shown are Available
- Thru-Bolts Available for 1 3/4" Thick Doors Only

DOOR	GLASS	GL. TAPE
1-3/4"	1/8"	GT-118
2"	3/8"	GT-118
2-1/4"	5/8"	GT-118
1-3/4"	3/16"	GT-114
1-3/4"	1/4"	GT-114
1-3/4"	5/16"	GT-114
1-3/4"	1/2"	GT-118
2"	3/4"	GT-118
1-3/4"	5/8"	GT-118
1-3/4"	3/4"	GT-316
1-3/4"	7/8"	GT-118
1-3/4"	1"	GT-118
1-3/4"	1-1/8"	GT-118
1"	3/8"	GT-118

Designed for Use on 1 3/4" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".

NGP-LIT-L-SG100-PCS-0323-B

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH