

LO-PRO-SSD

LOW PROFILE LITE KIT WITH SECURITY SLIDING DOOR


Anemostat
DOOR PRODUCTS



*Up to 90 Minutes

FOR 1 3/4" THICK DOORS AND 3/16" OR 1/4" GLASS

- ▶ 20 Ga. Cold Rolled Steel Lo-Pro Kit
- ▶ 12 Ga. Hot Rolled Pickled & Oiled Steel SSD Channel Frame and Sliding Door with Formed Pull Handle
- ▶ Mitered and Welded Corners
- ▶ Countersunk Mounting Screw-Holes
- ▶ Lo-Pro Kit: #8 x 1 3/4" Torx Security Pin Screws
SSD: #8 x 3/4" Torx Security Pin Screws
- ▶ Gray Primer (GPZ) Powder Coat Finish
- ▶ Maximum Size Available 17" x 35"
 - + 20 or 45 Minutes Fire-Rated = 1296 Sq. In. Visible Glass Max
 - + 60 or 90 Minutes Fire-Rated = 100 Sq. In. Visible Glass Max

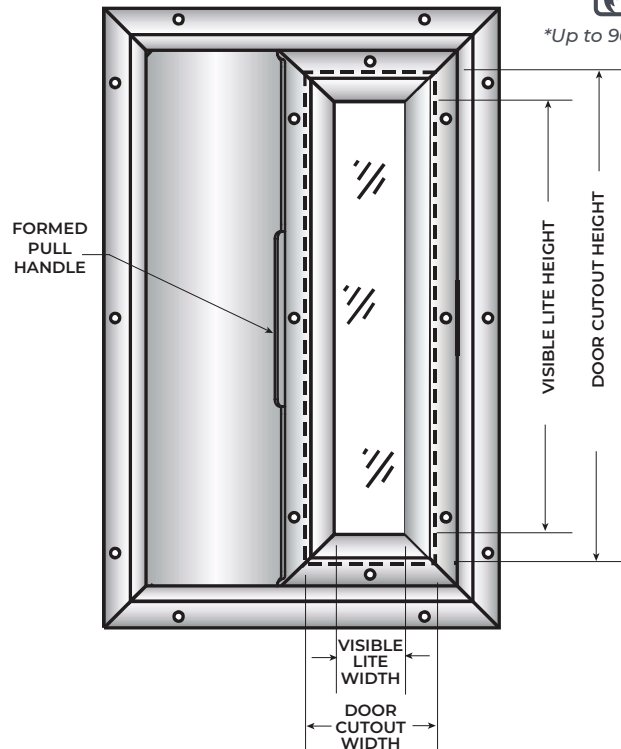


Required Information

- ▶ Order Size = Door Cutout Size

Available Options

- ▶ Powder Coat Color Options - See Page L3
- ▶ Galvanneal - A40 Steel (Lo-Pro Portion Only)
- ▶ Zinc Electroplating (SSD Zinc-EL Only)

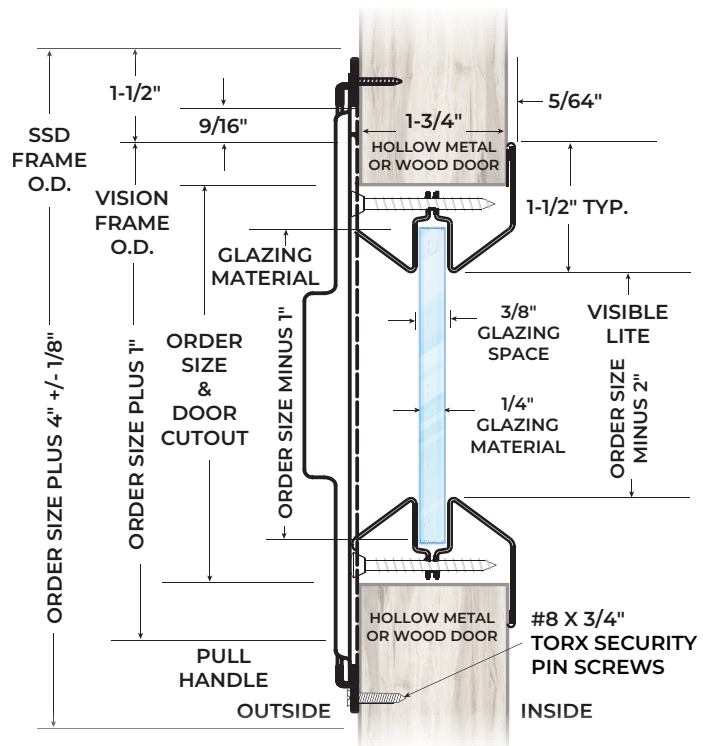

Not To Scale

Designed for Use on Doors Manufactured Within Door Industry Tolerance of +/- 1/16".