



LO-PRO-SSD SG-10-SSD

Lite Kit with Security Sliding Door



*Up to 90 Minutes



FIRE DOOR
GLASS LIGHT
FRAME


Maximum order sizes:

- LO-PRO-SSD: 17" x 35"
- SG-10-SSD: 17" x 34 1/2"
- Fire-rated SSD, LO-PRO-SSD, SG-10-SSD:
20 or 45 minutes = 1296 sq. in. visible glass max,
60 or 90 minutes = 100 sq. in. visible glass max

UL10C Positive Pressure rated fire doors using 1/4" wired glass: 20 min. requires closed cell PVC foam glazing tape like NGP L-GT-114, L-GT-116, L-GT-118, L-GT-132 or L-GT-316.

45, 60, 90 min requires NGP 9800C or 3M GIS intumescent glazing tape.

UL10C Positive Pressure rated fire doors using Pyran® Platinum F, FireLite®NT, Pyran® Platinum L, Protect3™ or 20T requires closed cell PVC foam glazing tape like NGP L-GT-114, L-GT-116, L-GT-118, L-GT-132 or L-GT-316.

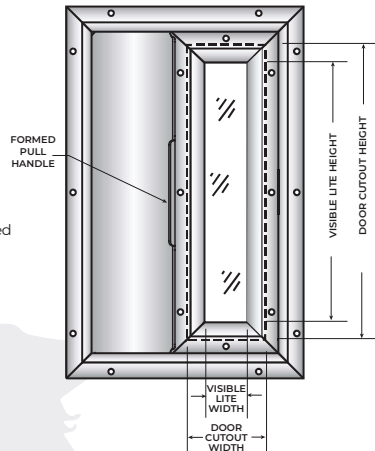

INSTALL LITE KIT

1. Cut out door in accordance with door manufacturers listing procedure. Steel fire-rated doors do NOT require an opening reinforcing channel or reinforcing clips.
2. If door cut-outs have radius corners it will be necessary to square them out prior to installing the lite kit.
3. Install glass & glazing material (sold separately), into lite kit.
4. Position outer frame in door cut out.
5. Position inner frame and insert and start all screws or thru-bolts before fully tightening.
6. Tighten screws or thru-bolts using a criss cross pattern. Use caution when using power screw driving equipment to avoid stripping the material.


(Continued on the back)

INSTALLATION INSTRUCTIONS

(Continued from the front)


INSTALL SSD SECURITY SLIDING DOOR

1. Position over lite Kit as illustrated
2. Insert and start all screws before fully tightening.
3. Tighten screws using a criss cross pattern. Use caution when using power screw driving equipment to avoid stripping the material.

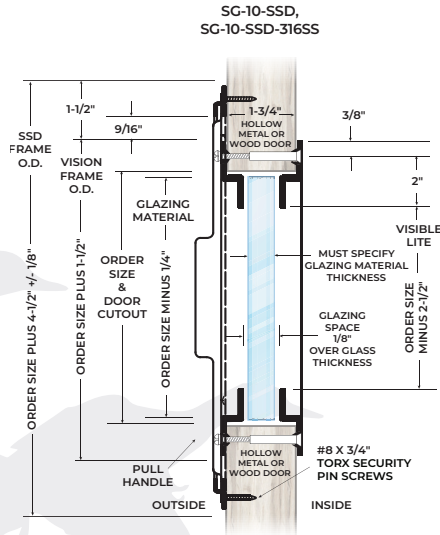

INSTALLATION INSTRUCTIONS

FIELD PAINTING: for best results scuff finish with a Scotch-Brite® pad prior to painting.

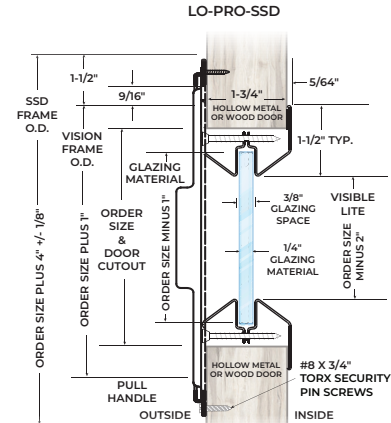

Fax: (800) 255-7874
Email: info@ngp.com

ngp.com
1-800-NGP-RUSH

Quotes: quotes@ngp.com
Orders: orders@ngp.com