



LO-PRO-SSD

Low Profile Lite Kit with Security Sliding Door

PRODUCT CUT SHEET

Anemostat
DOOR PRODUCTS

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

For 1 3/4" Thick Doors and 3/16" or 1/4" Glass



- 20 Ga. Cold Rolled Steel Lo-Pro Kit
- 12 Ga. Hot Rolled Pickled & Oiled Steel SSD Channel Frame and Sliding Door with Formed Pull Handle
- Mitered and Welded Corners
- Countersunk Mounting Screw-Holes
- Lo-Pro Kit: #8 x 1 3/4" Torx Security Pin Screws
SSD: #8 x 3/4" Torx Security Pin Screws
- Gray Primer (GPZ) Powder Coat Finish
- Maximum Size Available 17" x 35"
 - + 20 or 45 Minutes Fire-Rated = 1296 Sq. In. Visible Glass Max
 - + 60 or 90 Minutes Fire-Rated = 100 Sq. In. Visible Glass Max

Required Information:

- Order Size = Door Cutout Size

Available Options

- Powder Coat Color Options - See Color Chart on ngp.com
- Galvanneal - A40 Steel (Lo-Pro Portion Only)
- Zinc Electroplating (SSD Zinc-EL Only)

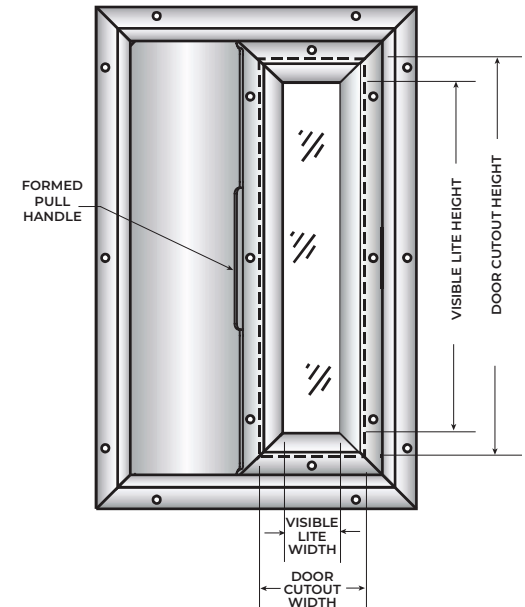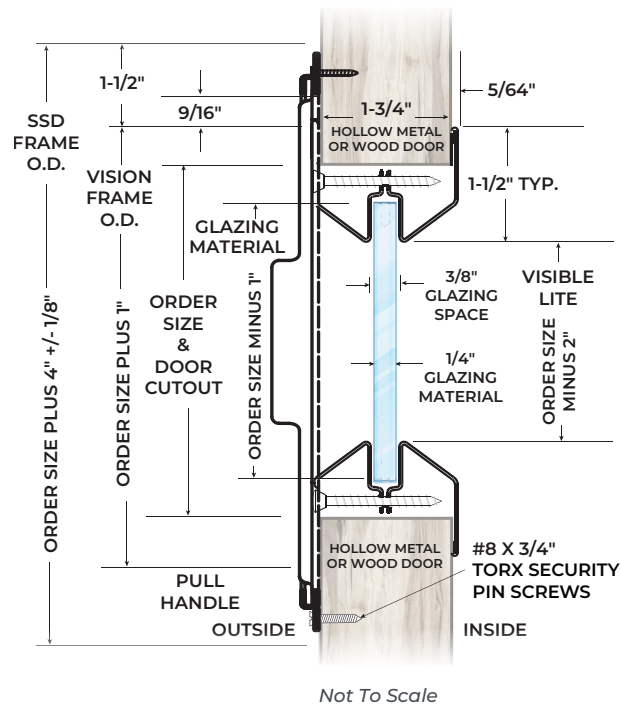

*Designed for Use on Doors
Manufactured Within Door
Industry Tolerance of +/- 1/16".*



NATIONAL GUARD PRODUCTS, INC.

MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com

NGP-LIT-LO-PRO-SSD-PCS-1225-A

ngp.com
1-800-NGP-RUSH