

# SELF-ADHESIVE TPE GASKETING

## PROPERTIES:



- ▶ Thermo-Plastic Elastomer (TPE)
- ▶ Good Abrasion Resistance
- ▶ Moisture-Resistant
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Energy Performance
- ▶ Rigid Base with Flexible Elastomeric Fins
- ▶ Flame-Resistant
- ▶ Temperature Range -60°F to 275°F
- ▶ Anti-Microbial: Treated with an Anti-Microbial Additive to Inhibit the Growth of Microorganisms
- ▶ REACH and RoHS Compliant
- ▶ Adhesive Specifications Shown on Page G15

## TPE TRIPLE FIN SMOKE SEAL

Available in 36", 48", 72", 84", 96" and 108" Lengths  
 \*White Available in 36", 48", 84" and 96" Lengths



<b>5075B</b>	Brown
<b>5075C</b>	Charcoal
<b>5075CL</b>	Clear
<b>5075W</b>	White*






## TPE DOUBLE SHARK FIN SMOKE SEAL

Smoke-Rated for Perimeter and/or Meeting Edge Astragal Applications  
 Available in 36", 48", 72", 84", 96" and 108" Lengths



\* Anti-Microbial Not Available in Clear

<b>5070B</b>	Brown
<b>5070CL</b>	Clear

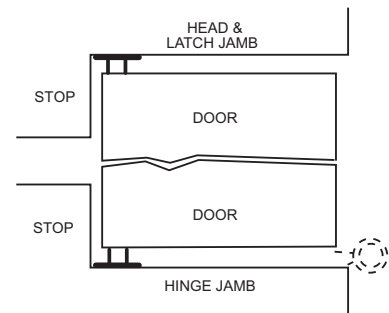

Astragal Application  
 Pair of Doors