

SG-10-SSD

THRU - BOLTED SECURITY LITE KIT WITH SECURITY SLIDING DOOR

FOR 1 3/4" UP TO 2 1/4" THICK DOORS AND 3/16" UP TO 1 9/16" GLASS



- ▶ 10 Ga. Cold Rolled Steel SG-10 Kit for Glass up to 1" Thick
- ▶ 12 Ga. Cold Rolled Steel SG-10 Kit for Glass Over 1" Thick
- ▶ 12 Ga. Cold Rolled Steel SSD Channel Frame and Sliding Door with Formed Pull Handle
- ▶ Mitered and Welded Corners
- ▶ Counter-Sunk Mounting Screw-Holes
- ▶ SG-10 Kit: #8-32 One Way Vandal Resistant Security Screw Thru-Bolts
SSD: #8 x 3/4" One Way Vandal Resistant Security Screws
- ▶ Gray Primer (GPZ) Powder Coat Finish

Required Information:

Specify Door Thickness if Other Than 1 3/4"
Specify Glass Thickness
Order Size = Door Cut-Out Size

Available Options

- ▶ Powder Coat Color Options - See Page L3
- ▶ Torx Security Thru-Bolts
- ▶ Zinc Electro-Plating
- ▶ Stainless Steel Type 304, #4 finish - Specify SG-10-SSD-SS
- ▶ Stainless Steel Type 316, #4 finish - Specify SG-10-SSD-316SS

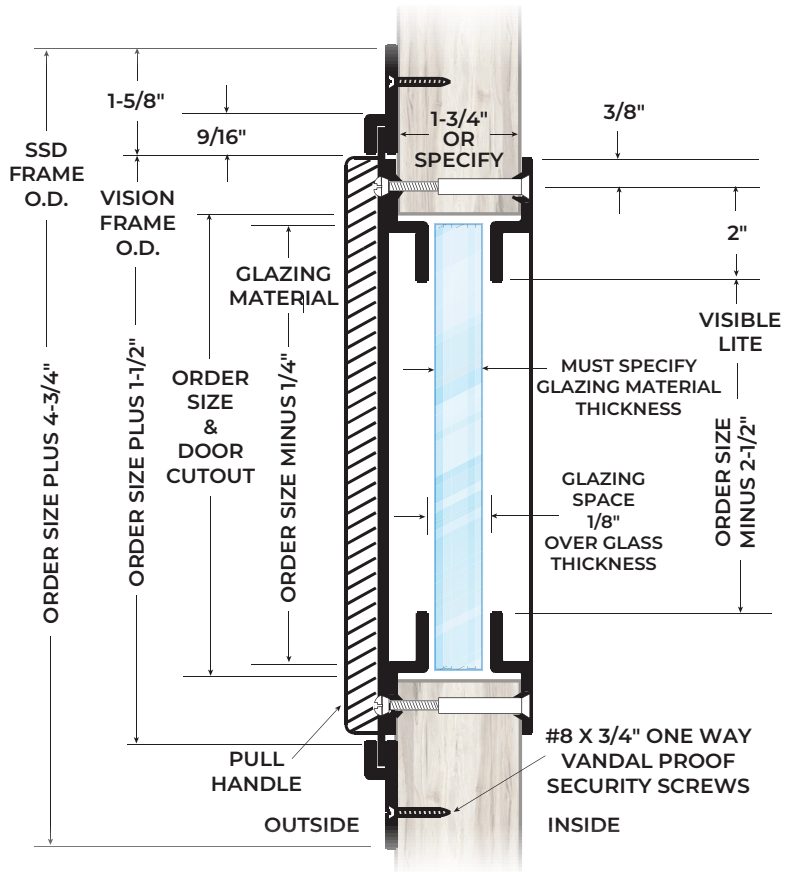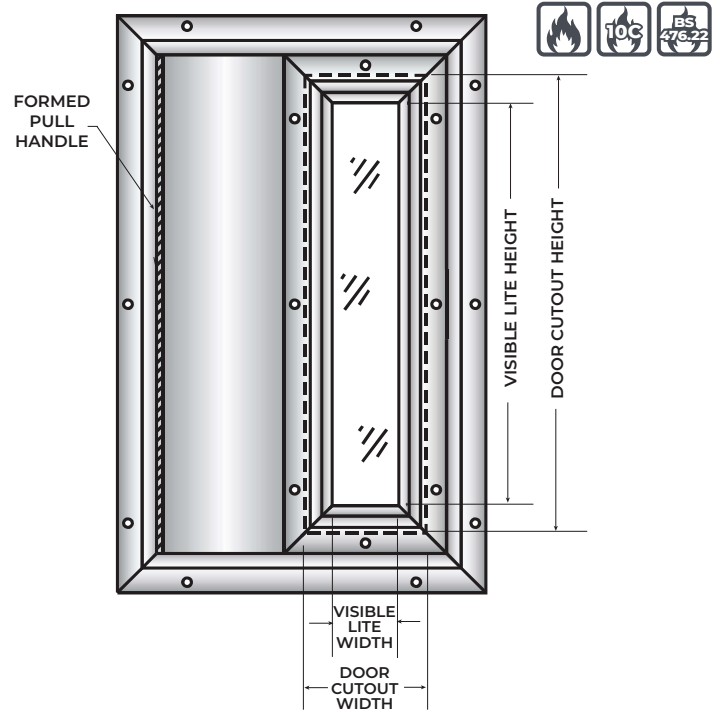

Not To Scale

Designed for Use on Doors Manufactured Within Door Industry Tolerance of +/- 1/16\"