



SG-10-SSD

Thru-Bolted Security Lite Kit with Security Sliding Door

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

For 1 3/4" up to 2 1/4" Thick Doors and 3/16" up to 1 9/16" Glass


- 10 Ga. Cold Rolled Steel SG-10 Kit for Glass up to 1" Thick
- 12 Ga. Cold Rolled Steel SG-10 Kit for Glass Over 1" Thick
- 12 Ga. Cold Rolled Steel SSD Channel Frame and Sliding Door with Formed Pull Handle
- Mitered and Welded Corners
- Counter-Sunk Mounting Screw-Holes
- SG-10 Kit: #8-32 One Way Vandal Resistant Security Screw Thru-Bolts
SSD: #8 x 3/4" One Way Vandal Resistant Security Screws
- Gray Primer (GPZ) Powder Coat Finish

Required Information:

Specify Door Thickness if Other Than 1 3/4"
Specify Glass Thickness
Order Size = Door Cut-Out Size

Available Options

- Powder Coat Color Options - See Color Chart on www.ngp.com
- Torx Security Thru-Bolts
- Zinc Electro-Plating
- Stainless Steel Type 304, #4 finish - Specify SG-10-SSD-SS
- Stainless Steel Type 316, #4 finish - Specify SG-10-SSD-316SS

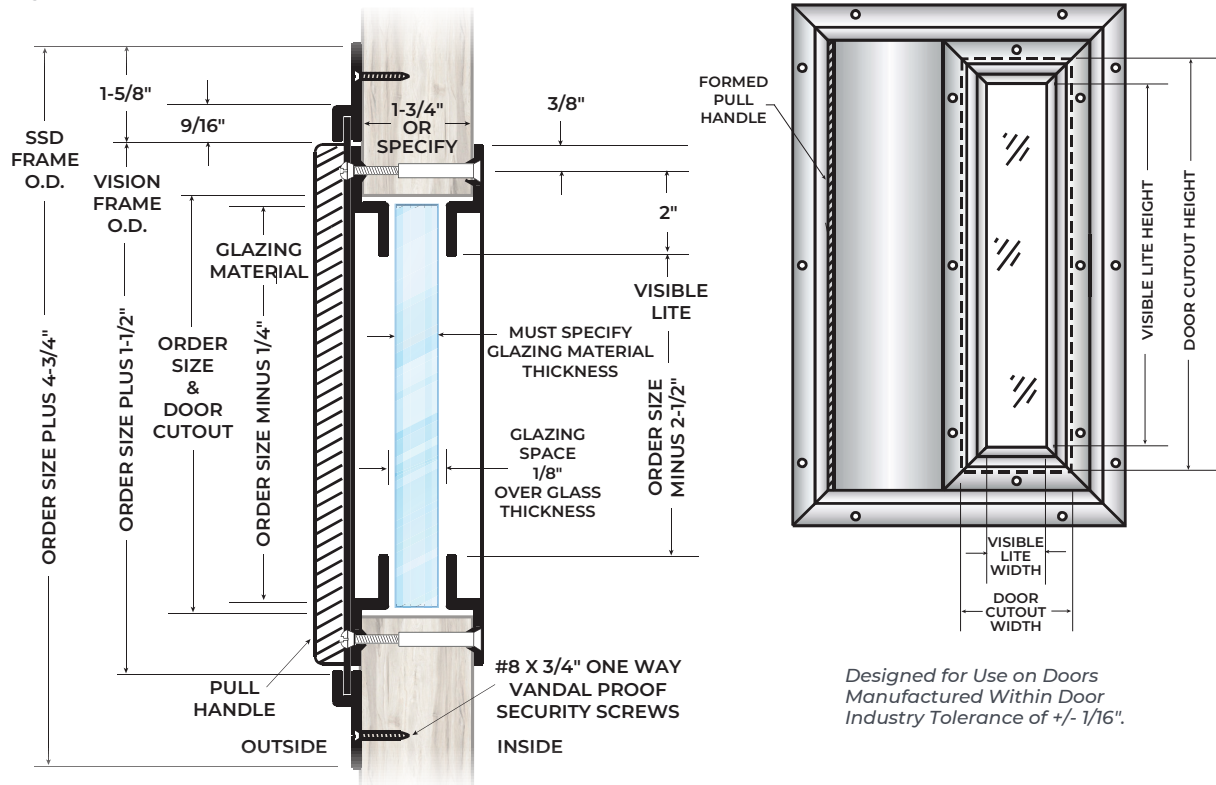

Not To Scale

Designed for Use on Doors
Manufactured Within Door
Industry Tolerance of +/- 1/16".

NGP-LIT-SG-10-SSD-PCS-1022-A



NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH