



SSD

Security Sliding Door for Vision Lite Kit
For 3/4" and Thicker Doors




*Up to 90 Minutes



FIRE DOOR
GLASS LIGHT
FRAME


Maximum size available
36" x 36".
- 20 or 45 minutes
Fire-rated = 1296 sq. in.
visible glass max. 36"
maximum
width or height.
- 60 or 90 minutes
Fire-rated = 100 sq. in.
visible glass max.

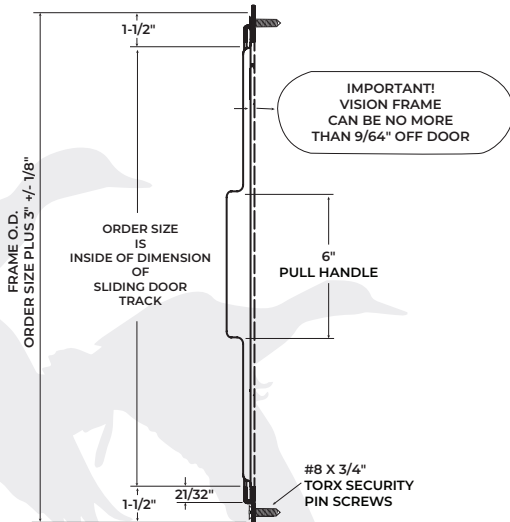

INSTALL LITE KIT

1. Position over Lite Kit as illustrated.
2. Insert and start all screws before fully tightening.
3. Tighten screws using a criss cross pattern.

Use caution when using power screw driving equipment to avoid stripping the material.

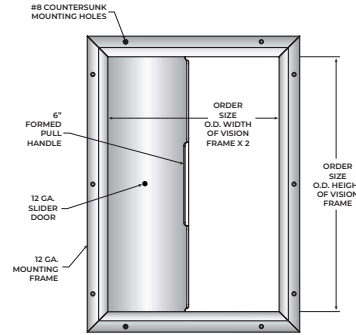

Designed for Use on 1 3/4" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/32"

