




## INSTALLATION INSTRUCTIONS

### 398, 399, 400, 401, 402, 407 PVC Carpet/Tile Dividers

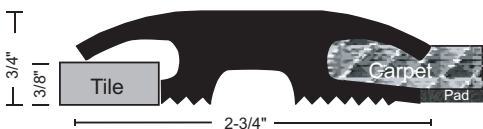

#### **WARNING:**

These products can expose you to chemicals including DEHP Plasticizer, which is known to the State of California to cause cancer and/or developmental and reproductive harm. For more information, go to [P65Warnings.ca.gov](http://P65Warnings.ca.gov).



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE

FIRE DOORS, RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS, RATED UP TO 1½ HOURS.  
CATEGORY J

**ngp.com**  
**1-800-NGP-RUSH**

FAX: (800) 255-7874  
QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)  
ORDERS: [orders@ngp.com](mailto:orders@ngp.com)

#### **NGP MEMPHIS**

4985 East Raines Road  
Memphis, TN 38118

#### **CARSON CITY**

3689 Arrowhead Drive  
Carson City, NV 89706



## INSTALLATION INSTRUCTIONS

### 398, 399, 400, 401, 402, 407 PVC Carpet/Tile Dividers



1. Cut threshold to size required.
2. Notch around door frame if desired.
3. Apply solid beads of adhesive to underside of threshold legs, so when set in place the adhesive spreads to thinly cover base of all legs.  
NOTE: Adhesive must be a type designed to bond PVC, concrete, wood, metal or other material to which threshold is being applied. NGP black silicone adhesive #RR-5007BL is specifically designed for use to install this threshold.
4. Affix threshold to desired location.

IMPORTANT NOTICE: DO NOT WALK ON OR APPLY WEIGHT TO THRESHOLD FOR 24 HOURS ALLOWING ADHESIVE TO FULLY CURE.

**ngp.com**  
**1-800-NGP-RUSH**

FAX: (800) 255-7874  
QUOTES: [quotes@ngp.com](mailto:quotes@ngp.com)  
ORDERS: [orders@ngp.com](mailto:orders@ngp.com)

**NGP MEMPHIS**  
4985 East Raines Road  
Memphis, TN 38118

**CARSON CITY**  
3689 Arrowhead Drive  
Carson City, NV 89706