



# Wired Glass

Fire Protective

## PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

### Material

- ▶ 1/4" (7mm) Thick
- ▶ 3/4" x 3/4" Diamond Pattern Electrically Welded Steel Wire Mesh
- ▶ Clear Glass - Ground and Polished Both Sides
- ▶ Maintains Integrity When Fractured or Subjected to a Hose Stream
- ▶ Etched with UL Classification on Each Piece
- ▶ Weight: 3 Lbs./Sq. Ft.
- ▶ STC 28 Rating

### Fire-Rating Information:


Certified by UL to:

- ▶ ANSI/UL10C: 20 Min. with Closed Cell PVC Foam Glazing Tape Like NGP L-GT-116, L-GT-118, or L-GT-132, 45, 60 & 90-Min. with NGP 9800C Intumescent Glazing Tape
- ▶ ANSI/UL9 with Closed Cell PVC Glazing Tape Like NGP L-GT-116, L-GT-118, L-GT-132

### Impact Safety Rating Information:

Meets ANSI Z97.1, Class C

Does **NOT** Comply with IBC 2006 or Newer Requirements for Use in Doors or Sidelights. Allowed Only in Non-Hazardous Locations Defined in IBC

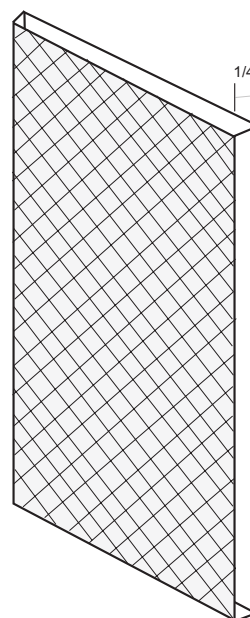

RATING	MAX. VISIBLE GLASS AREA (SQ. INCHES)	MAX. WIDTH VISIBLE GLASS	MAX. HEIGHT VISIBLE GLASS
20, 45 MINUTE	1,296	54"	54"
60, 90 MINUTE	100	10"	33"

*\*with Fire-Rated Glass Lite Kit*

NGP-GLA-WIRED-PCS-0223-A

**NGP MEMPHIS**  
 4985 East Raines Road  
 Memphis, TN 38118  
[orders@ngp.com](mailto:orders@ngp.com)

**NGP VEGAS**  
 4584 Calimesa Street  
 Las Vegas, NV 89115  
[vegasorders@ngp.com](mailto:vegasorders@ngp.com)

**ngp.com**  
 1-800-NGP-RUSH