


# X-RAY RADIATION SHIELDING GLASS

---

- ▶ 1/16" (1.6mm) Lead Equivalency
- ▶ Thickness 7/16" to 9/16"
- ▶ Lead Content 55% to 65% Pb
- ▶ Appearance: Clear with Yellow Hue Due to Radiation Protective Oxide Contents
- ▶ Weight: 8+ Lbs./Sq. Ft.
- ▶ Available in 1/8" (3.2mm) Lead Equivalency Upon Request
- ▶ Maximum Size: 48" x 96"

## Impact Safety Rating Information

- ▶ Complies With IBC Requirements for Use in Doors
- ▶ Permanently Labeled ANSI Z97.1 Class A and CPSC 16CFR 1201 Cat II

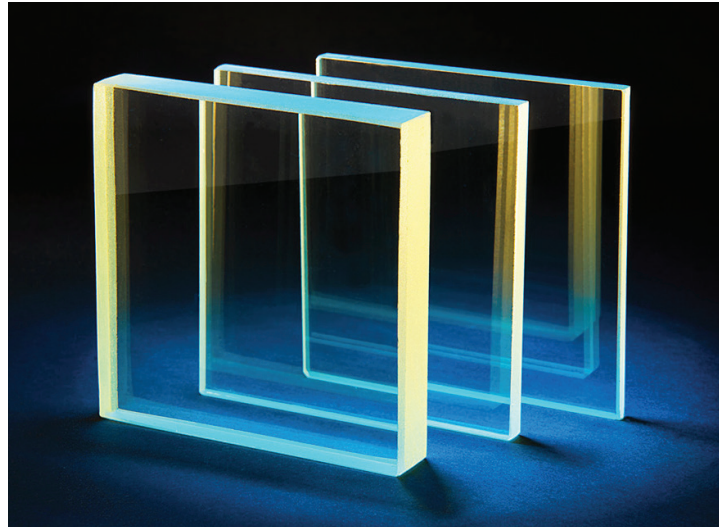

# PROTECT-BR3

## HIGH PERFORMANCE BULLET-RESISTING GLASS

---

- ▶ UL 752 Level 3, Including Spall Protection (.44 Magnum)
- ▶ Max Size: 70 7/8" x 94 1/2"
- ▶ Thickness: 1 1/2" (38mm)
- ▶ Weight: 18 Lbs./Sq. Ft.
- ▶ Does Not Contain Polycarbonate Which Can Discolor, Get Scratched or De-Laminate
- ▶ Features Replaceable Spall Protection Film
- ▶ Designed for Use in Similarly Rated Door and Window Assemblies
- ▶ Other Ballistic Levels Available on Special Order

