


TEMPERED GLASS

- ▶ Impact Safety-Rated: Complies With IBC Requirements for Use in Doors. Meets ANSI Z97.1 Class A and CPSC 16CFR 1201 (CAT I and II)
- ▶ 1/4" Thick Clear Heat Treated Glass
- ▶ Approximately 4 Times Stronger Than Annealed (Ordinary) Glass
- ▶ Breaks Into Small Harmless Fragments
- ▶ Can NOT Be Cut After Manufacturing
- ▶ 11" Minimum Height
- ▶ Manufactured in USA
- ▶ NOT Fire-Rated
- ▶ STC 31 Rating

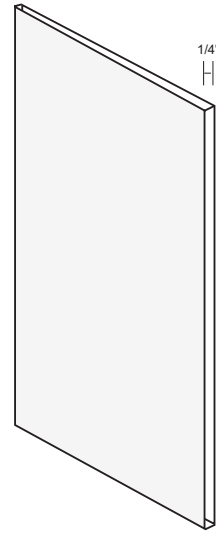

INSULATED TEMPERED GLASS

- ▶ Impact Safety-Rated: Complies With IBC Requirements for Use in Doors. Meets ANSI Z97.1 Class A and CPSC 16CFR 1201 (CAT I and II)
- ▶ 1" Thick - Consists of Two Pieces of 1/4" Thick Clear Tempered Glass With 1/2" Air Space Between and Butyl Seal
- ▶ Increased Energy Efficiency
- ▶ Approximately 4 Times Stronger Than Annealed (Ordinary) Glass
- ▶ Breaks Into Small Harmless Fragments
- ▶ Can NOT Be Cut After Manufacturing
- ▶ Manufactured in USA
- ▶ 5-Year Manufacturer Warranty
- ▶ NOT Fire-Rated
- ▶ STC 35 Rating

