



# 115N

## Neoprene Smoke-Rated Astragal Seal Set

### PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:



#### Material

Aluminum Alloy 6063, T5 Temper  
Synthetic EPDM Rubber in Polypropylene Thermoplastic Matrix  
Neoprene is Black

- ▶ Very Good Abrasion Resistance, Tensile Strength and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature Range -81°F to 275°F
- ▶ Good Resistance to Ozone, Sunlight and Aging
- ▶ BHMA Certified to ANSI/BHMA A156.22 Performance Tests for Heat, Cold, Air Infiltration and Smoke Infiltration
- ▶ Fire-Rated Astragal Seals Cannot Replace any Astragal Required on the Door by the Door Manufacturer to Maintain its Fire Label
- ▶ IBC, NFPA 80, NFPA105, and NFPA 252 Require the Gap at the Meeting Edge Between Fire Labeled Doors Must Not Exceed  $\frac{1}{8}$ "
- ▶ #6 x  $\frac{3}{4}$ " Stainless Steel Sheet Metal Screws Furnished
- ▶ Screw Holes are Slotted for Adjustment
- ▶ Provided as Two-Piece Set

#### Finishes

115NA Anodized Aluminum  
115NDKB Dark Bronze

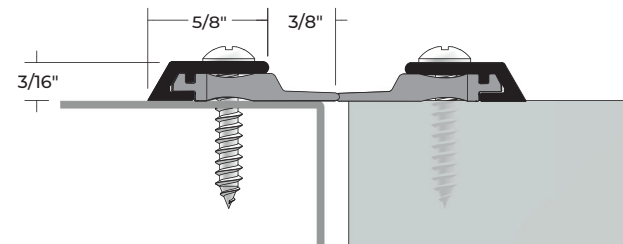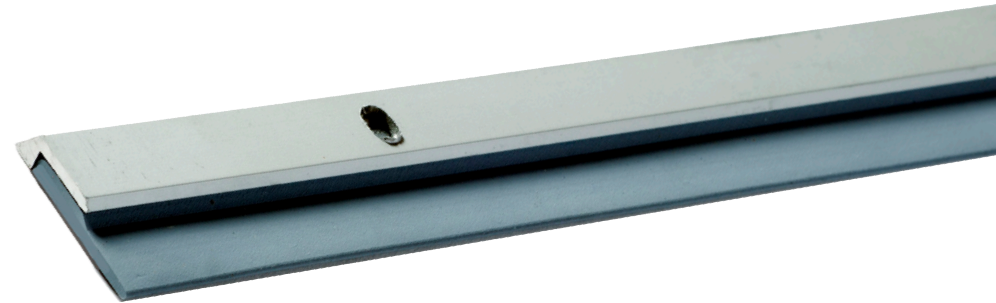

NGP-GKT-115NSET-PCS-0725-A

#### NATIONAL GUARD PRODUCTS, INC.

##### MEMPHIS

4985 East Raines Road  
Memphis, TN 38118

##### CARSON CITY

3689 Arrowhead Drive  
Carson City, NV 89706

Fax: (800) 255-7874

Email: info@ngp.com

Quotes: quotes@ngp.com

Orders: orders@ngp.com

**ngp.com**  
1-800-NGP-RUSH