



# 229WHBR

Nylon Brush Brass Automatic Door Bottom

## PRODUCT CUT SHEET

### Material

Alloy CDA 260 (Copper Alloy C26000)  
Synthetic Polymer: Polyamide  
Nylon Brush is Black

- ▶ Excellent Abrasion Resistance, Flexibility and Memory
- ▶ Moisture Resistant
- ▶ Retains Insecticides Well
- ▶ Temperature Range -70°F to 425°F
- ▶ REACH and RoHS Compliant
- ▶ Not Effective Against Water Penetration
- ▶ Mounts on Push Side of Door
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications Where No Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and Longer May Be Cut Up To 4" in the Field, Under 36" Should Not Be Cut in the Field, Order Net Length
- ▶ Minimum Length 11", Maximum Length 60"
- ▶ End Caps Furnished Standard
- ▶ Door Bottom is Handed. Right Hand Supplied Unless Specified. Units Under 36" Not Field Reversible. Please Specify Handing
- ▶ 7/8" Max Drop

### Finishes


Brass

### Options

Polished (721), suffix "POL"  
Dark Oxidized Oil Rubbed (722) Similar to US10B, Suffix DKB



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

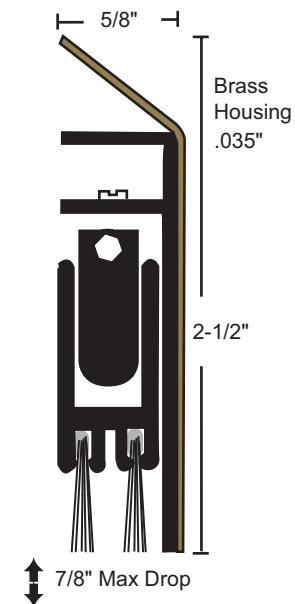

NGP-GKT-229WHBR-PCS-1220-A