



TEMP20™

20-Minute Fire Protective Glass

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

- ▶ 1/4" Thick Tempered Fire-Rated Glass
- ▶ Superior Optical Clarity – Clear and Wireless
- ▶ Economical Fire and Safety Rated Glass
- ▶ Etched with Fire and Impact Safety Classification on Each Piece
- ▶ Manufactured in USA
- ▶ Weight: 3 Lbs./Sq. Ft.
- ▶ STC 28 Rating

Fire-Rating Information:


- ▶ Certified by QAI to ANSI/UL10B, ANSI/UL10C, Installed with Closed Cell PVC Foam Glazing Tape Like NGP L-GT-116, L-GT-118, L-GT-132, or L-GT-316

Impact Safety Rating Information:

- Meets ANSI Z97.1, Class A
Meets CPSC 16CFR 1201 (Category I and II)
Complies with IBC Requirements for Use in Doors
- ▶ This Glass is Cut to Size Then Heat Treated (Tempered) to Achieve Its Safety Rating Properties
 - ▶ Orders for this Product are Non-Changeable and Non-Cancellable

Options:

- ▶ Available in Insulated Glass Units

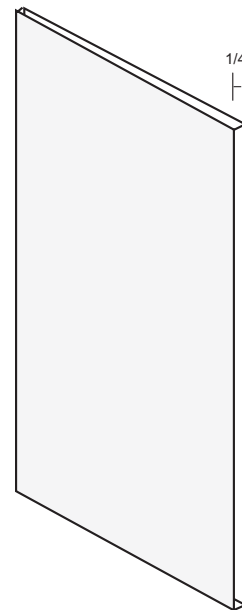

RATING	APPLICATION	MAX. VISIBLE GLASS AREA (SQ. INCHES)	MAX. WIDTH VISIBLE GLASS	MAX. HEIGHT VISIBLE GLASS
20 MINUTE NO HOSE STREAM	DOORS*	3,204	35 3/4"	88 3/4"

**with Fire-Rated Glass Lite Kit*

NGP-GLA-TEMP20-PCS-1220-A